

深圳麦格米特电气股份有限公司
SHENZHEN MEGMEET ELECTRICAL CO., LTD.
地址：





• 冗余直流电 量



输出电流

纹波及噪声(mV)

5V

7.5V

9V

12V

15V

18V

24V

075yyz


09yyz

12yyz

15yyz

18yyz

24yyz

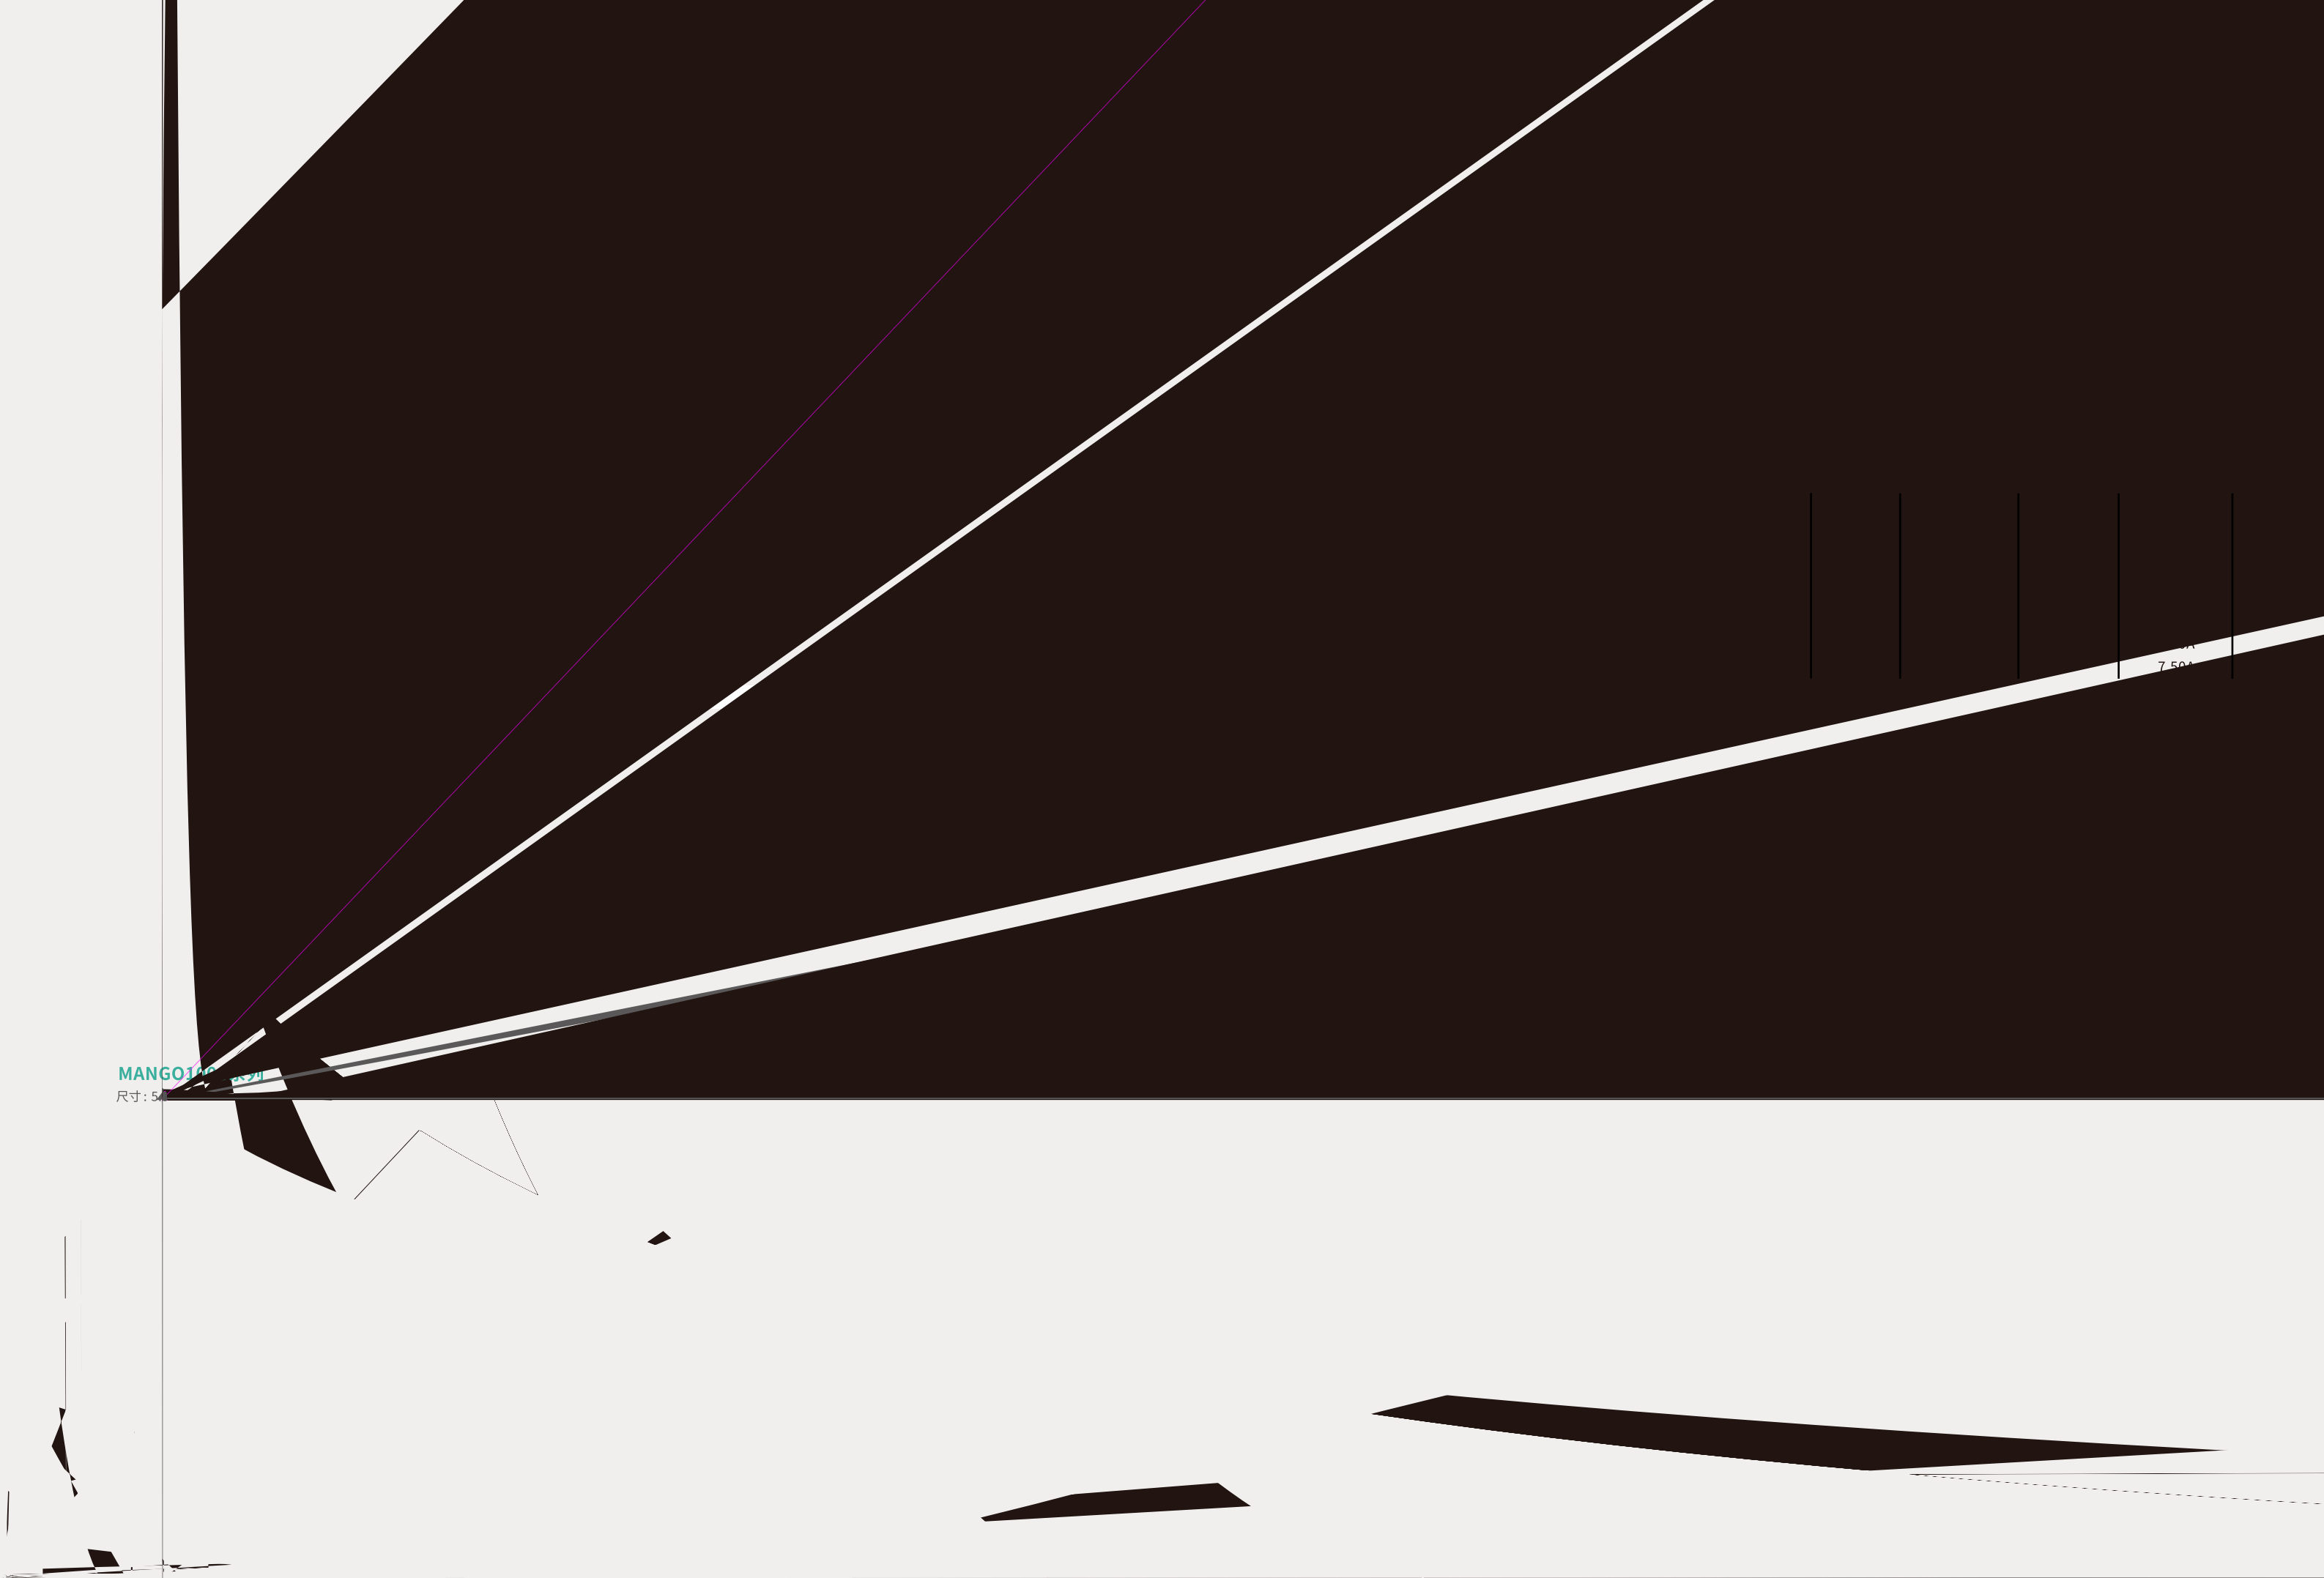


MANGO11C 系列

尺寸: 54

7.50

无源式电源

且部分带主动式PFC
iss II 结构
al V or Level VI
01-1 安规认证,符合CEC 2008 / ErP2 /EISA 2007标准,
11 / FCC Part 15 Class B Emissions



	5.6A	8mV
	5.6A	
	5.6A	
	5.41A	
	4.33A	
	3.61A	
	2.71A	

总调整率(含设定点)

MP300S系列

尺寸: 5x3x1.5"

产品型号	输出电压	输出电流	纹波及噪声(最大值)	总调整率
MP300S-12	12V	25.0A	200mV	±2%
MP300S-15	15V	20.0A	200mV	±2%
MP300S-19	19V	15.8A	280mV	±2%
MP300S-24	24V	12.5A	280mV	±2%
MP300S-28	28V	10.8A	280mV	±2%
MP300S-36	36V	8.33A	480mV	±2%
MP300S-48	48V	6.25A	480mV	±2%

MP400系列

尺寸: 7x3.94x1.58"



MP400-12		30.0A	120mV	
MP400-15		26.6A	150mV	
MP400-19		22.8A	200mV	
MP400-24		16.67A	240mV	
MP400-28		14.2A	280mV	
MP400-36		11.1A	360mV	
MP400-48		8.33A	480mV	



9A	150m
6A	
7A	
1.5A	
1.5A	
0.1A	
12A	

